

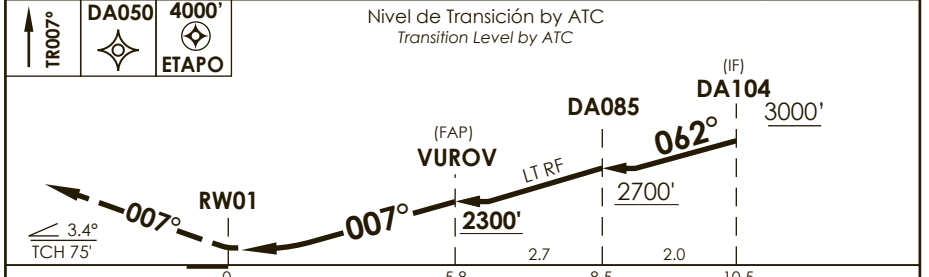


APP IQUIQUE RADAR Iquique Radar Approach	122.7	TORRE IQUIQUE Iquique Tower	118.9	CONTROL TERRESTRE Ground Control	121.7
RNAV	FINAL APCH CRS 007°	MNM ALT VUROV 2300'	DA/H ver mínimos DA/H refer to minimums	AD Elev. THR 01 Elev. 156'	
APCH FRUSTRADA: ASC en TR007° directo a DA050, luego en TR323° hacia ETAPO 4000' e ingresar en HLDG. Missed APCH: Climb on TR007° direct to DA050, then on TR323° to ETAPO 4000' and enter on HLDG.					
					MSA 25 NM RW01

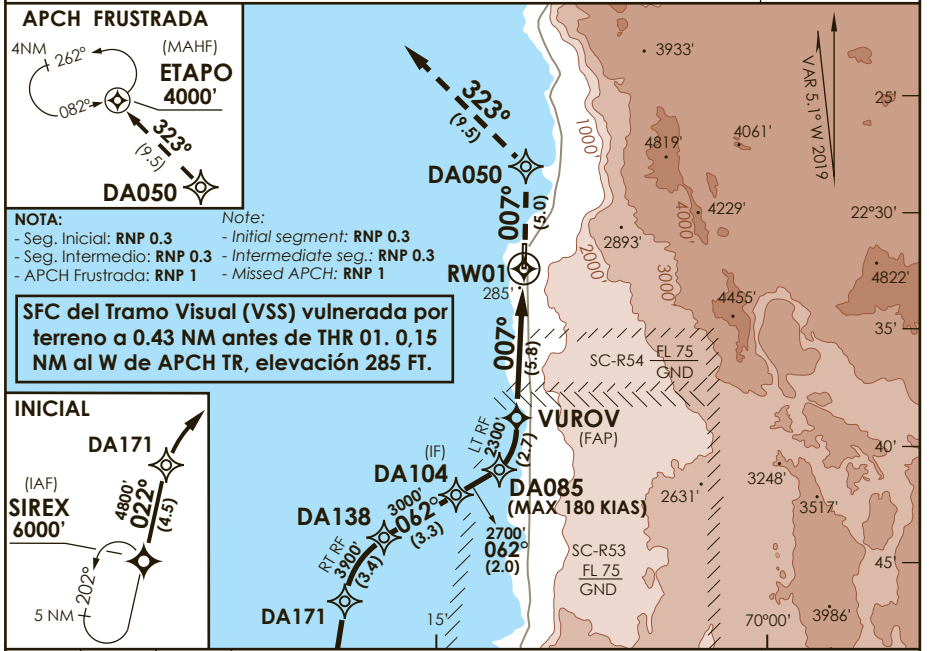

C A T E G O R I A	DIRECTO RWY 01 <i>Straight in RWY 01</i>		RNP AR RWY 01 SCDA: Requiere RF. Para sistemas Baro VNAV no compensados proc NA bajo 5°C o sobre 45°C. Autorización requerida de acuerdo a DAN 06-22. RF required. For uncompensated Baro VNAV systems procedure NA below 5°C or above 45°C. Authorization required according to DAN 06-22. Mantenerse en o sobre trayectoria PAPI TIL THR Remain on or above PAPI path TIL THR.			
	RNP 0.30		MNM ALTN: RNP 0.30 : (1484') 5.0 Km.			
	DA 1640' (1484')					
	5.0 Km					
Veloc. Terrestre Kts	80	100	120	140	160	RQR AUTORIZACIÓN ESPECIAL PARA ACFT Y CREW SPECIAL ACFT AND AIRCREW AUTHORIZATION REQUIRED LDG NIGHT NA WO PAPI Landing at night not authorized without PAPI
Angulo DES 3,4° FPM	481'	602'	722'	842'	963'	
MAPt en DA						

DASA7 SECCION AIS-MAP